
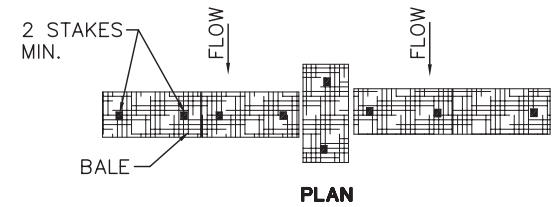



**BALE INLET FILTER**

**NOTES**

**A.** THIS METHOD OF INLET PROTECTION IS APPLICABLE WHERE THE INLET DRAINS A RELATIVELY FLAT AREA (SLOPES NO GREATER THAN 5%) WHERE SHEET OR OVERLAND FLOWS (NOT EXCEEDING 0.5 CFS) ARE TYPICAL.

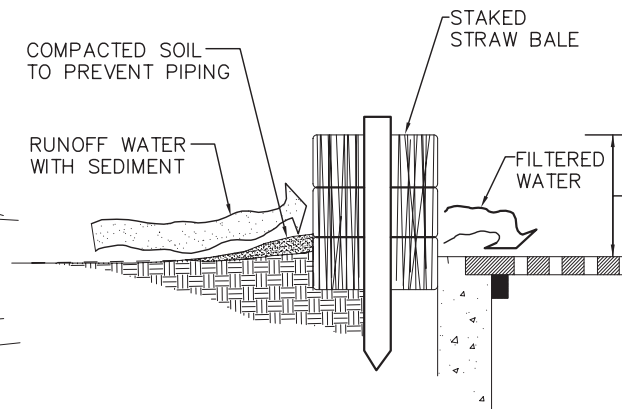

**PLAN**

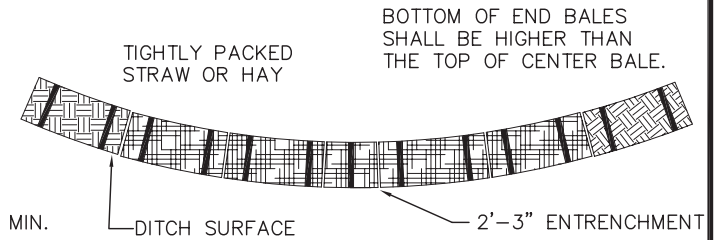

**ELEVATION**

**BALE DITCH CHECK**

**NOTES**

**A.** PLACEMENT OF BALES SHALL BE TIGHTLY PLACED, ADJACENTLY, AND ENTRENCHED 2" AND 3" BEFORE STAKING AND A SMALL AMOUNT OF LOOSE SOIL SHALL BE LIGHTLY COMPACTED ALONG THE UPSTREAM EDGE OF THE BALES OR SEE ODOT STANDARD CONSTRUCTION DRAWING MC-11.

**B.** EACH BALE SHALL BE FIRMLY STAKED WITH A MINIMUM OF 2 STAKES AT LEAST 3' IN LENGTH. STAKE SHALL BE WOODEN 2" X 2", REINFORCING BARS OR FENCE POST, AS APPROVED BY THE CITY.

**C.** LOOSE STRAW OR HAY SHALL BE SCATTERED FOR A DISTANCE OF 10' ON THE UPSTREAM SIDE OF EACH DITCH CHECK, AND SHALL BE WEDGED BETWEEN AND UNDER STAKED BALES.